

538705

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



10 JUN 2005



(43) International Publication Date  
1 July 2004 (01.07.2004)


PCT

(10) International Publication Number  
**WO 2004/056060 A1**

- (51) International Patent Classification<sup>7</sup>: **H04L 27/36**, H03C 3/40
- (21) International Application Number: PCT/EP2003/014261
- (22) International Filing Date: 15 December 2003 (15.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
02258665.5 17 December 2002 (17.12.2002) EP  
60/434,938 19 December 2002 (19.12.2002) US
- (71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON** (publ) [SE/SE]; S-164 83 Stockholm (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BRISTOW, Robert** [GB/GB]; 9 Sonning Close, Basingstoke, Hants RG22 5JJ (GB).
- (74) Agent: **VIGARS, Christopher, Ian**; Haseltine Lake, Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR QUADRATURE MODULATION TECHNICAL FIELD

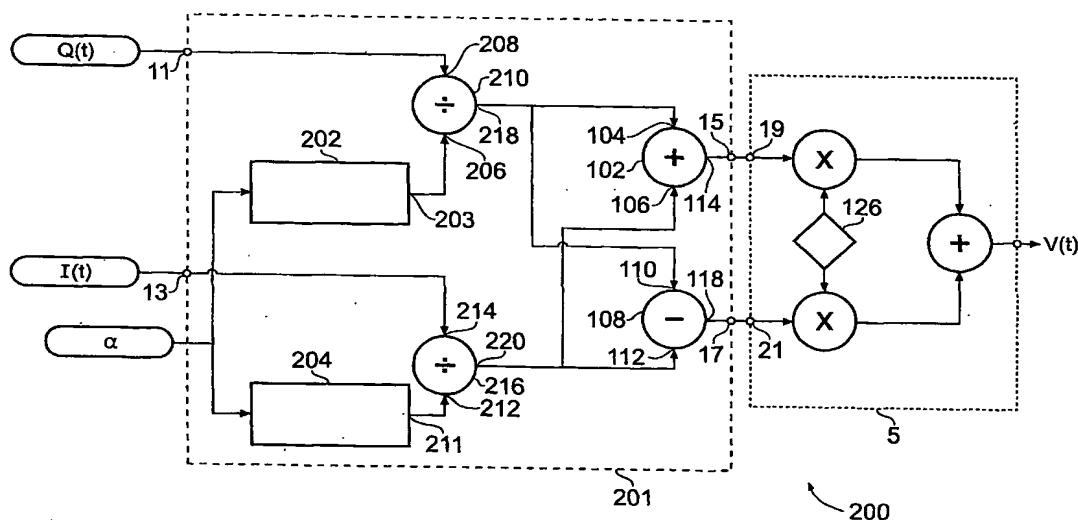

(57) Abstract: A method and apparatus (200) for modulating I and Q signals to compensate for phase error between the quadrature outputs of a local oscillator (126) of a quadrature modulator(s). The error in the quadrature outputs of the local oscillator is effectively compensated by pre-processing (201) incoming  $I(t)$  and  $Q(t)$  baseband signals to generate composite signals adding (102) and subtracting (108) scaled (202, 210, 204, 214)  $I(t)$  and  $Q(t)$ . These composite signals form the input (19, 21) of quadrature modulator(s), the method comprising the steps of: applying a first scaling factor to an input I signal; applying a second scaling factor to an input Q signal; adding the scale I and Q signals; subtracting the scale I and Q signals; and quadrature modulating the added and subtracted signals.

WO 2004/056060 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **METHOD AND APPARATUS FOR QUADRATURE MODULATION**

### **TECHNICAL FIELD**

The present invention relates to a method and apparatus for quadrature modulation.

5

### **BACKGROUND OF THE INVENTION**

In a quadrature modulator used in wireless communication systems, for example, it is desirable to modulate the magnitude and phase of the carrier signal, namely

10

$$V(t) := M(t) \sin(\omega t + \phi(t))$$

where  $t$  is time;  $\omega$  is the angular frequency of the carrier in radians per second;  $M(t)$  is the time varying magnitude component of the modulation; and  $\phi(t)$  is the time varying phase component of the modulation.

15

By performing a simple polar to Cartesian conversion on the formula above, the  $M$  and  $\phi$  can be replaced by  $I$  and  $Q$ :

20

$$V(t) := \sqrt{I(t)^2 + Q(t)^2} \cdot \sin\left(\omega t + \arctan\left(\frac{Q(t)}{I(t)}\right)\right)$$

This can be simplified to

25

$$V(t) := \sqrt{I(t)^2 + Q(t)^2} \cdot \left( \sin(\omega t) \cdot \cos\left(\arctan\left(\frac{Q(t)}{I(t)}\right)\right) + \cos(\omega t) \cdot \sin\left(\arctan\left(\frac{Q(t)}{I(t)}\right)\right) \right)$$

Since

$$\cos\left(\arctan\left(\frac{Q(t)}{I(t)}\right)\right) = \frac{I(t)}{\sqrt{I(t)^2 + Q(t)^2}}$$

30 and

$$\sin\left(\arctan\left(\frac{Q(t)}{I(t)}\right)\right) = \frac{Q(t)}{\sqrt{I(t)^2 + Q(t)^2}}$$

the resulting expression for the modulated carrier waveform is:

35

$$V(t) := I(t) \sin(\omega t) + Q(t) \cos(\omega t)$$

A quadrature modulator, therefore, needs to take the incoming baseband signals  $I(t)$  and  $Q(t)$  and perform the above operation to modulate them. However, to do this accurately in an electronic circuit, two sinewaves in precise quadrature need to be produced i.e. generate the above sin and cos terms. In conventional IQ modulators, this is achieved by an accurate quadrature local oscillator.

The outputs of the quadrature local oscillator, ideally, have a phase difference of exactly  $90^\circ$ . However, at high frequencies achieving and maintaining the accuracy of the  $90^\circ$  phase shift is not always possible and inaccuracy often occurs. This causes errors in the modulated carrier to occur. The local oscillator error can be corrected, for example, as disclosed by US 4717894, however, such modulators are generally complex in design.

Compensation of amplitude and phase errors in a received signal is disclosed by EP 0602394. The technique is to scale the baseband signals by a correction factor. This correction factor is dynamically determined from the incoming received signals. The sum and difference of the baseband signals are derived from the unscaled and scaled signals. Either the sum or difference signal is scaled by a second correction factor to make the amplitude of the sum and difference equal. However, this technique is only effective if the signals result from a constant amplitude received carrier signal. Consequently, this technique could not be applied to an arbitrary modulation format, e.g. QAM in which case the amplitude component of the modulation would be distorted.

## SUMMARY OF THE INVENTION

The object of the invention is to provide a technique and apparatus which can easily compensate for errors in the quadrature and that can be used with a conventional modulator with any modulation format. The technique of the invention is basically to compute the sum and difference of scaled I and Q signals, and these composite signals are passed to a conventional quadrature modulator, the scaling factor being derived from the phase error of the quadrature local oscillator. The end result is to give an easy way of eliminating the error caused by the sin and cos terms not being exactly  $90^\circ$  apart.

## **BRIEF DESCRIPTION OF DRAWINGS**

Figure 1 is a simplified, block diagram of the modulating means according to an  
5 embodiment of the present invention;

Figure 2 is a more detailed schematic diagram of the modulating means of Figure  
1;

Figure 3 is a schematic diagram of a modulating means according to another  
embodiment of the present invention; and

10 Figure 4 is a block diagram illustrating the method according to an embodiment of  
the present invention.

## **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

15 A preferred embodiment of the present invention will now be described with  
reference to Figure 1.

The modulating means 1 of the preferred embodiment of the present invention  
comprises a pre-processor 3 and modulator 5. The modulating means 1 further  
20 comprises a first input terminal 7 and a second input terminal 9. The first input  
terminal 7 receives the  $Q(t)$  incoming baseband signal. The second input terminal  
9 receives the  $I(t)$  incoming baseband signal. The first input terminal 7 is  
connected to a first input terminal 11 of the pre-processor 3. The second input  
terminal 9 of the modulating means 1 is connected to a second input terminal 13 of  
25 the pre-processor 3. The pre-processor 3 comprises a first output terminal 15 and a  
second output terminal 17. The first output terminal 15 of the pre-processor 3 is  
connected to a first input terminal 19 of the quadrature modulator 5. The second  
output terminal 17 of the pre-processor 3 is connected to a second input terminal  
21 of the modulator 5. The modulator 5 further comprises an output terminal 23  
30 which is connected to an output terminal 25 of the modulating means 1. The  
output terminal 25 of the modulating means 1 outputting the modulated signal  $V(t)$ .

The pre-processor 3 computes the sum and difference of the I and Q signals input  
on the first and second input terminals 11, 13 of the pre-processor 3. The sum of  
35 the I and Q signals is output at the first output terminal 15 of the pre-processor 3  
and is input into the modulator 5 at the first input terminal 19 of the modulator 5.

The difference of the I and Q signals is output at the second output terminal 17 of the pre-processor 3 to be input into the modulator 5 at the second input terminal 21 of the modulator 5.

- 5 The modulator 5 may comprise a conventional quadrature modulator and the first and second input terminals 19, 21 of the modulator 5 correspond to the input terminals of a conventional quadrature modulator which would ordinarily receive the incoming Q and I baseband signals, respectively.
- 10 The composite signal input into the modulator 5 at the first and second input terminals 19, 21 of the modulator 5 are quadrature modulated to generate the modulated signal  $V(t)$  which is output on the output terminal 23 of the modulator 5 and hence the output terminal 25 of the modulating means 1.
- 15 The pre-processor 3, in computing the sum and difference of the I and Q signals and providing these on the input of a quadrature modulator 5 can effectively compensate for any phase error in the local oscillator as illustrated below.

In more detail, with reference to Figure 2, the pre-processor 3 of Figure 1  
20 comprises an adder 102 having two input terminals 104, 106. The first input terminal 104 of the adder 102 is connected to the first input terminal 11 of the pre-processor 3 which receives the incoming  $Q(t)$  baseband signal. The second input terminal 106 of the adder 102 is connected to the second input terminal 13 of the pre-processor 3 which receives the incoming  $I(t)$  baseband signal. The pre-processor 3 also includes a subtractor 108 having two input terminals 110, 112.  
25 The first input terminal 110 of the subtractor 108 is connected to the first input terminal 11 of the pre-processor 3. The second input terminal 112 of the subtractor 108 is connected to the second input terminal 13 of the pre-processor 3. The adder 102 has an output terminal 114 which is connected to the first output terminal 15 of the pre-processor 3. The subtractor 108 has an output terminal 118 connected to the second output terminal 17 of the pre-processor 3.  
30

The modulator 5 comprises a pair of mixers 122, 124, a local oscillator signal generator 126 and adder 128. A first input terminal 130 of the first mixer 122 is  
35 connected to the first input terminal 19 of the modulator 5. A first input terminal 132 of the second mixer 124 is connected to the second input terminal 21 of the

modulator 5. A second input terminal 134 of the first mixer 122 and a second input terminal 136 of the second mixer 124 are connected to quadrature outputs 138 and 140 of the local oscillator generator 126. An output terminal 142 of the first mixer 122 and an output terminal 144 of the second mixer 124 are connected to respective input terminals 146, 148 of the adder 128. An output terminal 150 of the adder 128 is connected to the output terminal 23 of the modulator 5.

It is assumed that the modulator 5 is not ideal. Therefore, it is assumed that instead of the cos and sin terms which should be produced on these outputs 138, 140, there exists two sin terms separated by the angle  $\alpha$ . In an ideal modulator having no phase error, the correct sin and cos terms would be produced on the quadrature outputs 138, 140 of the local oscillator generator 126 and in this case  $\alpha$  would be  $90^\circ$ .

The sum and difference of the I and Q signals are applied at the first and second input terminals 19, 21 of this nonideal modulator 5, and the overall result is:

$$V(t) := (I(t) - Q(t)) \cdot \sin(\omega t) + (I(t) + Q(t)) \cdot \sin(\omega t + \alpha)$$

using standard trig formulae for  $\sin(a) + \sin(b)$  and  $\sin(a) - \sin(b)$

$$2I(t) \cdot \sin\left[\frac{\omega t + (\omega t + \alpha)}{2}\right] \cdot \cos\left[\frac{\omega t + (\omega t + \alpha)}{2}\right] + 2Q(t) \cdot \sin\left[\frac{(\omega t + \alpha) - \omega t}{2}\right] \cdot \cos\left[\frac{(\omega t + \alpha) + \omega t}{2}\right]$$

or:

$$2 \cdot I(t) \cdot \cos\left(\frac{\alpha}{2}\right) \cdot \sin\left(\omega t + \frac{\alpha}{2}\right) + 2 \cdot Q(t) \cdot \sin\left(\frac{\alpha}{2}\right) \cdot \cos\left(\omega t + \frac{\alpha}{2}\right)$$

Therefore, replacing the I and Q signals with I+Q and I-Q produces the effect of ideal quadrature in the carrier sinewaves, since they appear in the form of sin and cos functions with the same angle argument.

However, the magnitude has increased by a factor of 2 and the absolute phase has moved forward by  $\pi/4$ . These changes are not usually important in a wireless application since the absolute phase of the carrier is of no importance, and the amplitude is usually controlled by other means.

The I and Q waves are scaled by small amounts related to the phase error of the original modulator. To confirm that the formula is correct  $\alpha$  is set to  $90^\circ$  ( $\pi/2$  radians), then:

$$5 \quad 2 \cdot I(t) \cdot \cos\left(\frac{1}{2} \cdot \frac{\pi}{2}\right) \cdot \sin\left(\omega t + \frac{1}{2} \cdot \frac{\pi}{2}\right) + 2 \cdot Q(t) \cdot \sin\left(\frac{1}{2} \cdot \frac{\pi}{2}\right) \cdot \cos\left(\omega t + \frac{1}{2} \cdot \frac{\pi}{2}\right)$$

now:

$$10 \quad \sin\left(\frac{\pi}{4}\right) = \cos\left(\frac{\pi}{4}\right) = \frac{\sqrt{2}}{2}$$

resulting in:

$$I(t) \cdot \sqrt{2} \cdot \sin\left(\omega t + \frac{\pi}{4}\right) + Q(t) \cdot \sqrt{2} \cdot \cos\left(\omega t + \frac{\pi}{4}\right)$$

- 15 This is equivalent to the output of an ideal modulator with  $\frac{\pi}{4}$  phase shift and a gain scaling factor of  $\sqrt{2}$ .

The operation of the modulating means 1 of the above preferred embodiment of the present invention can be further improved by scaling the incoming I and Q signals. An embodiment of an implementation of such a modulating means is shown in Figure 3. The elements which correspond to the same elements of Figures 1 and 2 have identical reference numerals.

The modulating means 200 is the same as the modulating means 1 shown in Figures 1 and 2 except that the pre-processor 201 further comprises a first scaling factor generating means 202 and a second scaling factor generating means 204. An output terminal 203 of the first scaling factor generating means 202 is connected to an input terminal 206 of a first divider 210. Another input terminal 208 of the first divider 210 is connected to the first input terminal 11 of the pre-processor 201 which receives the incoming  $Q(t)$  baseband signal. An output terminal 211 of the second scaling factor generating means 204 is connected to an input terminal 212 of a second divider 216. Another input terminal 214 of the second divider 216 is connected to the second input terminal 13 of the pre-processor 201 which receives the incoming  $I(t)$  baseband signal. An output terminal 218 of the first divider 210 is connected to the first input terminal 104 of the adder 102 and the first input terminal 110 of the subtractor 108. The output



terminal 220 of the second divider 216 is connected to the second input terminal 112 of the subtractor 108 and the second input terminal 106 of the adder 102.

The first scaling factor generating means 202 calculates a first scaling factor of  $2.\sin(\alpha/2)$ . The second scaling factor generating means 204 calculates a second scaling factor of  $2.\cos(\alpha/2)$ .

This results in the signal input  $Q(t)$  on the first input terminal 11 of the pre-processor 201 being scaled by the factor  $2.\sin(\alpha/2)$  and the signal input  $I(t)$  on the second input terminal 13 of the pre-processor 201 being scaled by the factor  $2.\cos(\alpha/2)$ .

The incoming Q and I signals are first divided by a factor  $2.\sin(\alpha/2)$  and  $2.\cos(\alpha/2)$  respectively, added and subtracted from each other to generate two outputs on the output terminals 15, 17 of the pre-processor 201 for input into the I and Q modulator 5 at input terminals 19, 21 of the modulators, namely:

$$\frac{Q(t)}{2.\sin(\alpha/2)} + \frac{I(t)}{2.\cos(\alpha/2)}$$

and

$$\frac{I(t)}{2.\cos(\alpha/2)} - \frac{Q(t)}{2.\sin(\alpha/2)}, \text{ respectively}$$

These pre-processed outputs are then used as the inputs to the conventional modulator 5 in which the modulator is assumed to be non-ideal such that, as above, instead of expected sin and cos terms the local oscillator 126 has the characteristics of two sin terms separated by an angle  $\alpha$ , which in an ideal modulator would be  $90^\circ$ . This results in:

$$\left( \frac{Q(t)}{2.\sin(\alpha/2)} + \frac{I(t)}{2.\cos(\alpha/2)} \right) \sin(\omega t + \alpha) + \left( \frac{I(t)}{2.\cos(\alpha/2)} - \frac{Q(t)}{2.\sin(\alpha/2)} \right) \sin(\omega t)$$

grouping together I and Q elements:

$$\left( \frac{Q(t)}{2.\sin(\alpha/2)} \right) (\sin(\omega t + \alpha) - \sin(\omega t)) + \left( \frac{I(t)}{2.\cos(\alpha/2)} \right) (\sin(\omega t + \alpha) + \sin(\omega t))$$

Now using standard trig formulae for  $\sin(a) + \sin(b)$  and  $\sin(a) - \sin(b)$

$$\left( \frac{Q(t)}{\sin(\alpha/2)} \right) \sin \left[ \frac{(\omega t + \alpha) - \omega t}{2} \right] \cos \left[ \frac{(\omega t + \alpha) + \omega t}{2} \right] + \left( \frac{I(t)}{\cos(\alpha/2)} \right) \sin \left[ \frac{\omega t + (\omega t + \alpha)}{2} \right] \cos \left[ \frac{\omega t - (\omega t + \alpha)}{2} \right]$$

5 or:

$$\left( \frac{Q(t)}{\sin(\alpha/2)} \right) \sin \left( \frac{\alpha}{2} \right) \cos \left( \omega t + \frac{\alpha}{2} \right) + \left( \frac{I(t)}{\cos(\alpha/2)} \right) \cos \frac{\alpha}{2} \sin \left( \omega t + \frac{\alpha}{2} \right)$$

which results in:

10

$$Q(t) \cos \left( \omega t + \frac{\alpha}{2} \right) + I(t) \sin \left( \omega t + \frac{\alpha}{2} \right)$$

15 The result is that the modulator behaves as if the carrier is applied in perfect quadrature. Consequently, irrespective of the quadrature error of the local oscillator, in the apparatus of the present invention the error can be easily compensated for.

A method of the preferred embodiment of the present invention will now be described with reference to Figure 4. Incoming  $Q(t)$  and  $I(t)$  baseband signals are  
20 quadrature modulated to generate the modulated output  $V(t)$ . In the preferred embodiment the  $Q(t)$  and  $I(t)$  signals are pre-processed and then modulated. The pre-processing stages generate composite signals  $I'(t) + Q'(t)$  and  $Q'(t) - I'(t)$ . These composite signals form the input of the modulating stages to generate the output  $V(t)$ . The pre-processing stages effectively compensate for any phase shift  
25 error in the quadrature outputs of the local oscillator of the modulator in the modulating stages.

The pre-processing stages comprise the step 402 of scaling the incoming  $Q(t)$  baseband signal and the concurrent step 404 of scaling the incoming  $I(t)$  baseband  
30 signal. The scaling steps 402 and 404 may not be utilised in the method of the present invention. Amplitude control of the resulting modulated output  $V(t)$  may be made by other means.

The scaled  $I'(t)$  and  $Q'(t)$  signals are then added at step 406 and subtracted at step  
35 408. The resulting composite signals of the adding and subtracting steps 406 and 408 are then provided as the inputs to the modulating stages. The input composite

signals  $I'(t) + Q'(t)$  and  $Q'(t) - I'(t)$  are mixed with respective quadrature outputs of a local oscillator, having a relative phase of  $\alpha$  therebetween, at steps 410, 412. These mixed signals are added together at step 414 and the resulting modulated signal  $V(t)$  is output at step 416. The pre-processing stages of adding and  
5 subtracting 406, 408 the incoming  $Q(t)$  and  $I(t)$  baseband signals and the preferred additional steps of scaling 402, 404 the incoming  $Q(t)$  and  $I(t)$  baseband signals effectively compensates for phase error in the quadrature outputs of the local oscillator of the quadrature modulator (used during the modulating stages) as illustrated above.

10

Although preferred embodiments of the method and apparatus of the present invention has been illustrated in the accompanying drawings and described in the forgoing detailed description, it will be understood that the invention is not limited to the embodiments disclosed, but is capable of numerous variations, modifications  
15 without departing from the scope of the invention as set out in the following claims.

**CLAIMS**

1. A method for compensating for phase error in a quadrature local oscillator of a quadrature modulator, the method comprising the steps of:

5 generating a first scaling factor and a second scaling factor, the first scaling factor and the second scaling factor being derived from the phase error of the quadrature local oscillator used during quadrature modulation, the first scaling factor comprising  $2 \cdot \cos(\alpha/2)$ , wherein  $\alpha$  is the relative phase of the quadrature outputs of the local oscillator utilised during quadrature modulation of the added and subtracted  
10 signals;

scaling input I and Q signals by the first and second scaling factors, respectively;  
adding the scaled I and Q signals;  
subtracting the scaled I and Q signals; and  
quadrature modulating the added and subtracted signals.

15 2. A method for modulating I and Q signals, the method comprising the steps of:  
generating a first and second scaling factor dependent on the phase error of the quadrature outputs of a local oscillator utilised during quadrature modulation, the first scaling factor comprising  $2 \cdot \cos(\alpha/2)$ , wherein  $\alpha$  is the relative phase of the quadrature  
20 outputs of the local oscillator utilised during quadrature modulation of the added and subtracted signals;

applying a first scaling factor to an input I signal;  
applying a second scaling factor to an input Q signal;  
adding the scaled I and Q signals;  
25 subtracting the scaled I and Q signals; and  
quadrature modulating the added and subtracted signals.

3. A method according to claim 1 wherein the second scaling factor comprises  $2 \cdot \sin(\alpha/2)$ , wherein  $\alpha$  is the relative phase of the quadrature outputs of the local  
30 oscillator utilised during quadrature modulation of the added and subtracted signals.

4. A quadrature modulator for modulating I and Q signals comprising:  
a first scaling means for scaling the input I signal by a first factor, the first scaling  
factor comprising  $2 \cdot \cos(\alpha/2)$ , wherein  $\alpha$  is the relative phase of a local oscillator utilised  
35 during quadrature modulation of the added and subtracted signals;  
a second scaling means for scaling the input Q signal by a second factor;

adding means for adding the scaled I and Q signals;  
subtracting means for subtracting the scaled I and Q signals; and  
modulating means for quadrature modulating the added and subtracted signals,  
wherein the first and second scaling factors are dependent on the phase error of a local  
5 oscillator utilised during quadrature modulation of the added and subtracted signals.

10 5. A quadrature modulator according to claim 4, wherein the second scaling factor comprises  $2 \cdot \sin(\alpha/2)$ , wherein  $\alpha$  is the relative phase of a local oscillator utilised during quadrature modulation of the added and subtracted signals.

15 6. A quadrature modulator according to claim 4 or 5, wherein the modulating means comprises:  
a local oscillator for generating quadrature local oscillator signals having a phase difference;  
15 a pair of mixers to combine the added and subtracted signals with respective quadrature local oscillator signals;  
adding means to add the outputs of the pair mixers.

20 7. A mobile communications device including at least one quadrature modulator according to any one of claims 4 to 6.



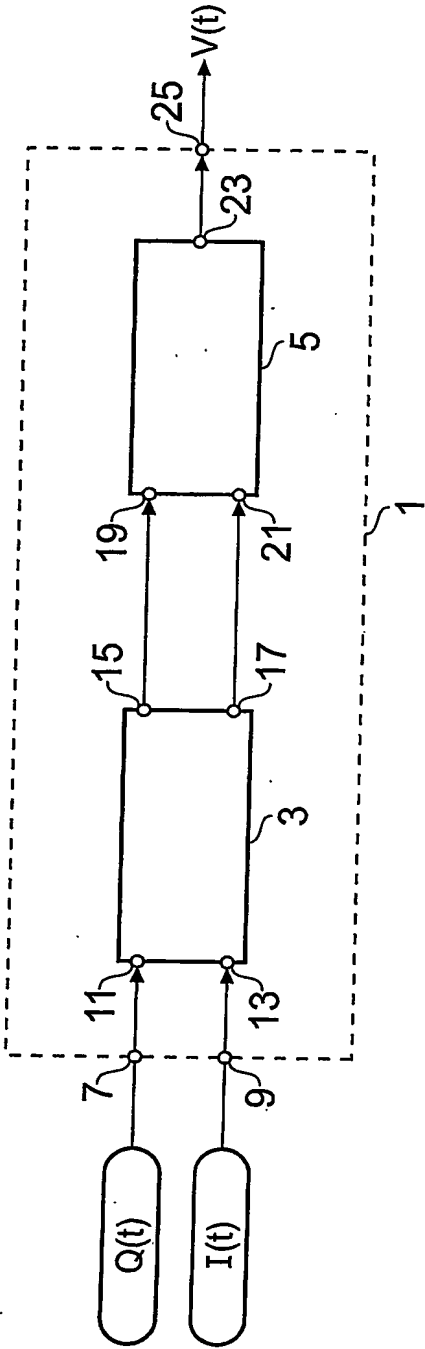


Fig. 1



**Fig. 2**

3/4

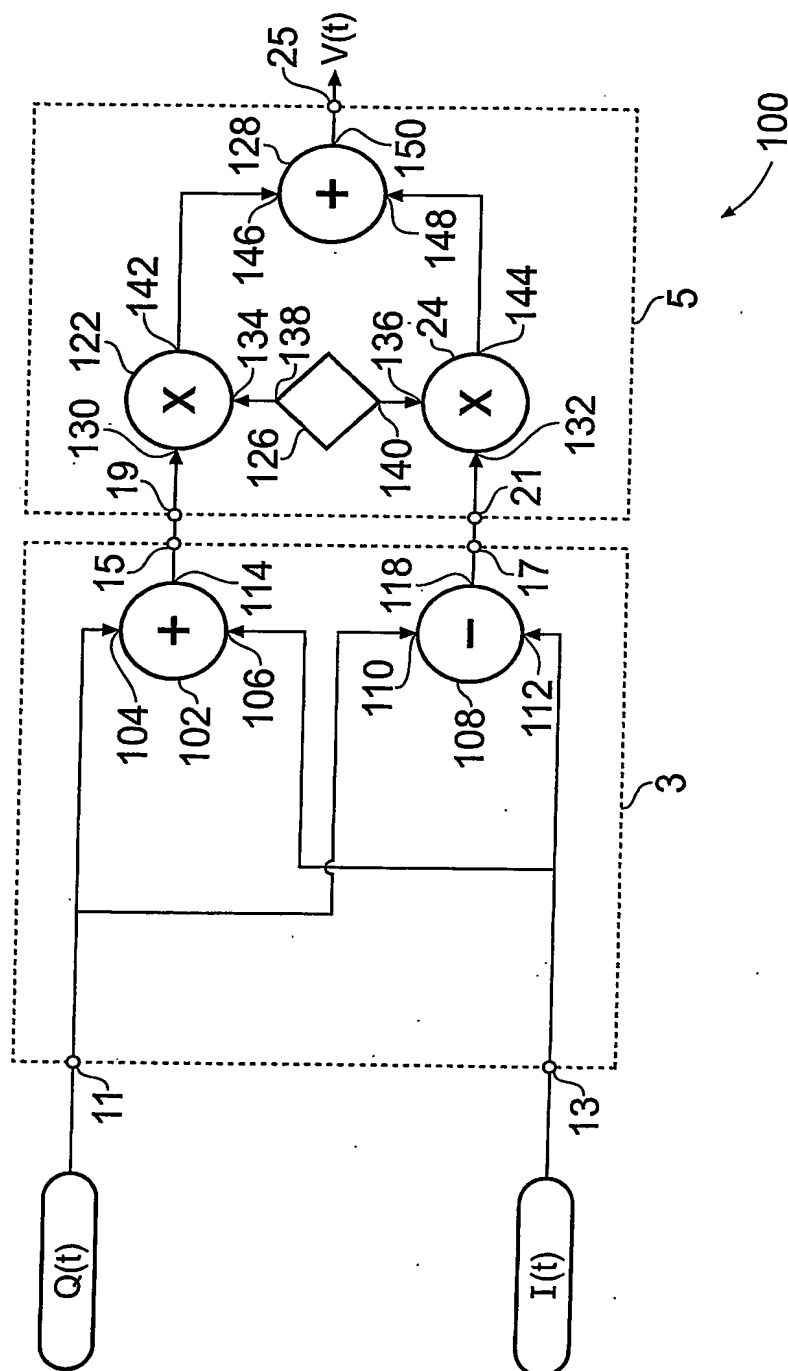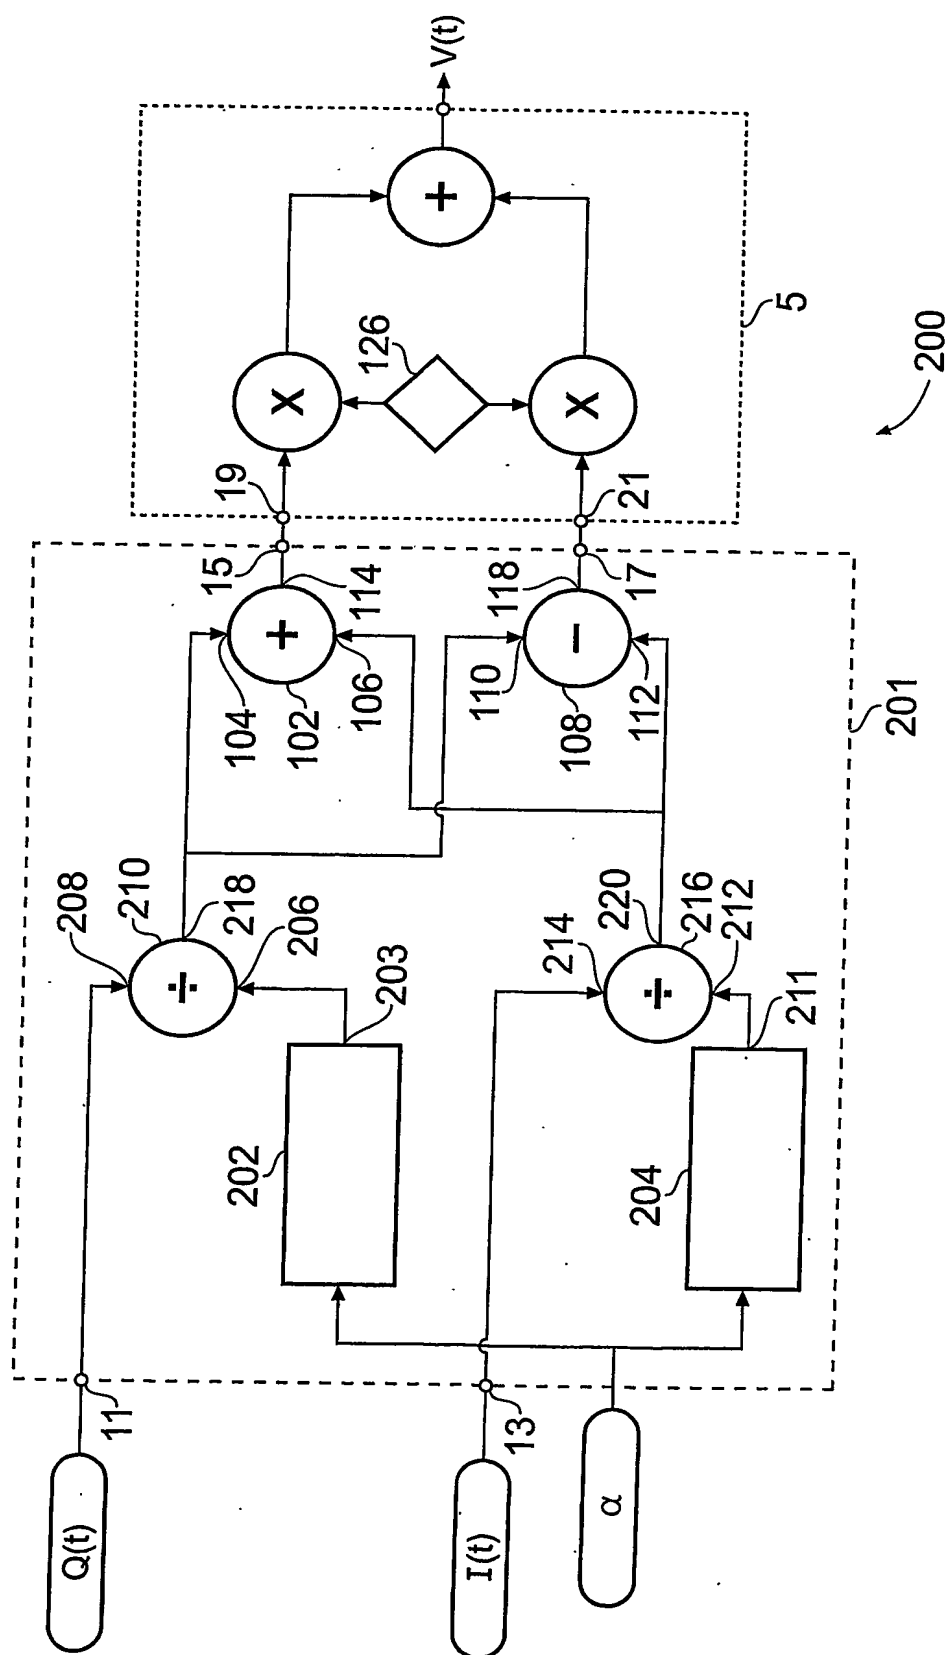



4/4

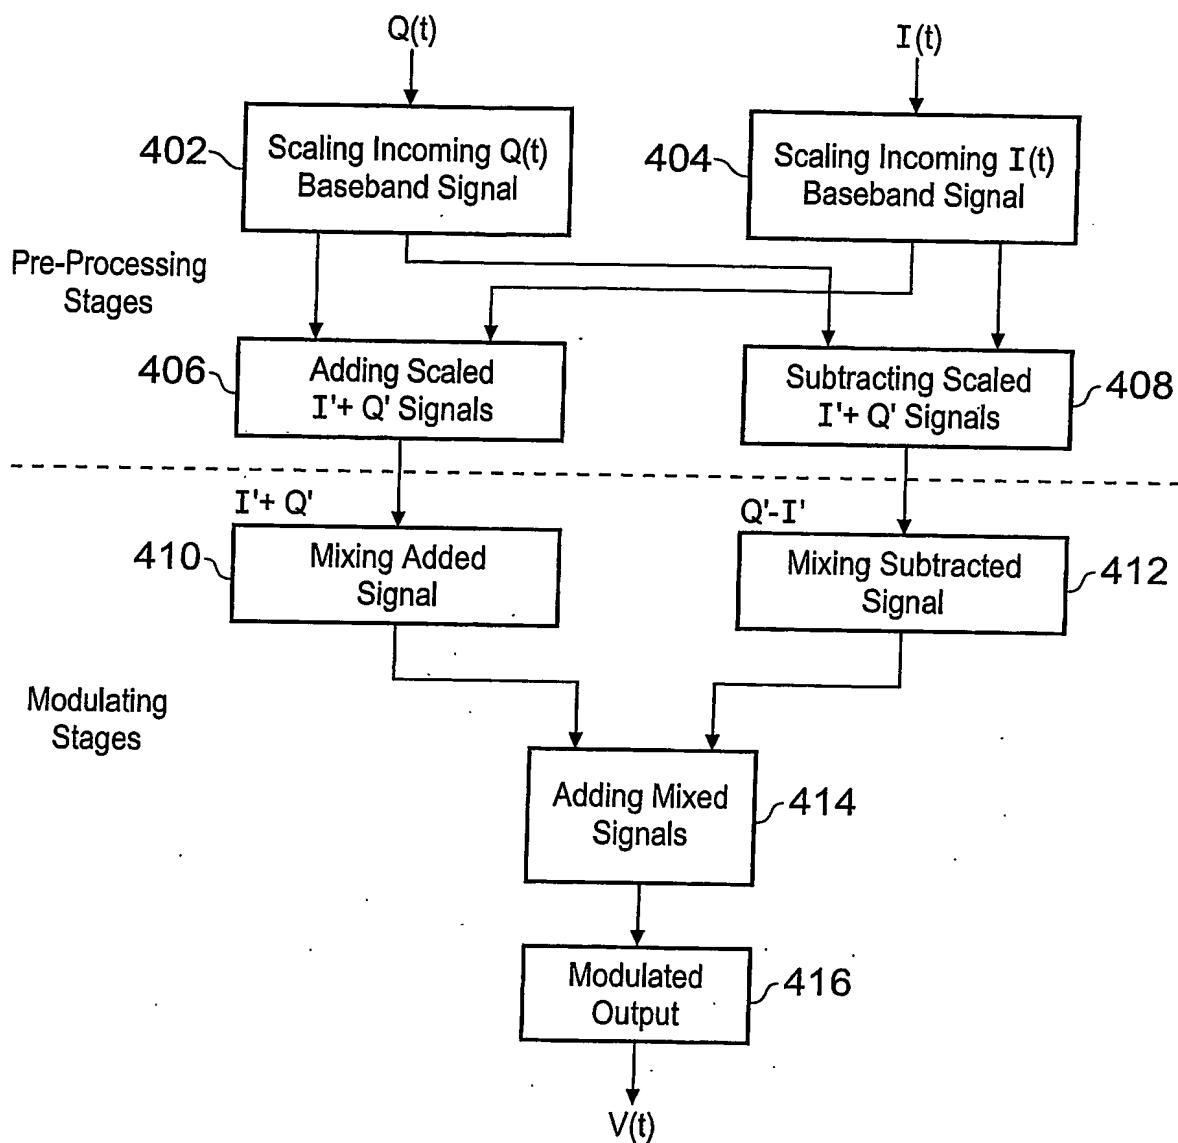


Fig. 4

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/E 3/14261

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 H04L27/36 H03C3/40

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H03C H03D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, PAJ, IBM-TDB, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 111 155 A (KEATE CHRISTOPHER R ET AL) 5 May 1992 (1992-05-05) abstract column 2, line 35 - line 67 column 5, line 45 - line 52 column 6, line 26 - line 36 figures 5,6A	1-7
Y	WO 01 63760 A (MOTOROLA INC) 30 August 2001 (2001-08-30) abstract page 2, line 6 - line 28 page 3, line 4 - line 12 figure 2	1-7
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

23 March 2004

Date of mailing of the international search report

26/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Baltersee, J

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/14261

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 240 142 B1 (APARIN VLADIMIR ET AL) 29 May 2001 (2001-05-29) abstract column 4, line 48 -column 5, line 6 column 5, line 65 -column 6, line 32 column 8, line 40 - line 43 figure 2	1-7
A	US 5 438 301 A (MONTGOMERY ROBERT K ET AL) 1 August 1995 (1995-08-01) abstract column 1, line 49 -column 2, line 7	1-7

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/14261

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5111155	A	05-05-1992	NONE	
WO 0163760	A	30-08-2001	US 6222405 B1 AU 3668301 A WO 0163760 A1	24-04-2001 03-09-2001 30-08-2001
US 6240142	B1	29-05-2001	AU 760605 B2 AU 2028299 A BR 9906790 A CA 2316969 A1 CN 1288607 T EP 1046223 A1 ID 26491 A JP 2002501316 T WO 9935736 A1	15-05-2003 26-07-1999 31-10-2000 15-07-1999 21-03-2001 25-10-2000 11-01-2001 15-01-2002 15-07-1999
US 5438301	A	01-08-1995	EP 0695067 A2 JP 8130442 A	31-01-1996 21-05-1996